


TETON STEEL 2' DELTA RIB



2' DELTA RIB

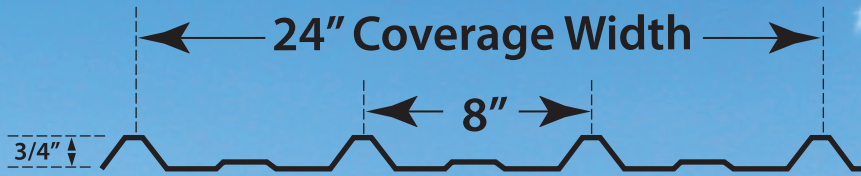

TETON STEEL

2' DELTA RIB

MATERIAL SPECIFICATIONS



Made in Idaho - Refer to Color Chart for Color Availability

LOAD TABLES


ALLOWABLE LOADS-PSF									
SIMPLE SPAN					3 OR MOR SPAN				
2-0	2-6	3-0	3-6	4-0	2-0	2-6	3-0	3-6	4-0
136	86	60	43	34/12	215	140/110	96/62	70/31	56/22
184	106/63	72/40	54/21	41/20	266	171/146	118/62	88/49	67/30

- 1 1/2" Bearing Length
- Load Span Tables Based on Working Stress
- Flexural Design analysis according to AISI "Specification for the Design of Light Gauge Cold-Formed Steel Structural Members" May 1981
- Continuous Span Loading applies to sheets continuous over three or more spans
- Weight of sheet has not been allowed for when calculating live load and Uplift.
- Deflection (L/180) limiting live load based on deflection of span.
- Metal thickness based on minimum ASTM specifications for allowable load calculations
- Loads may be increased by 1/3 for wind loads


Areas of discontinuity are subject to higher spikes in wind pressure, therefore a different coefficient in wind pressure will need to be considered and multiplied by a factor of 1.5

Data from: 1994 UBC Table 16-F

Note: The load tables have been compiled for the design of steel roofing and siding used in conjunction with either wood or steel framed structures. Teton Steel assumes no responsibility, either expressed or implied, for its use.

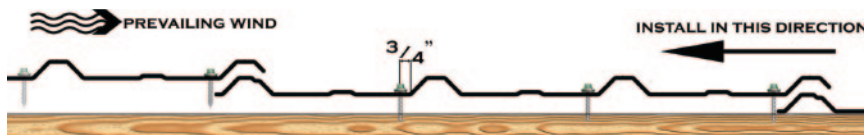

SCREW FASTENING - EAVES & END LAPS



Gauge: 28

Weight: 1.5 lb. /LF

Steel Yield Stress: 50,000 psi
Galvalume Steel Gauge, AZ-50

Paint System: Stormshield Xt-40,
Energy Star® Rated,
Silicone Modified Polyester

Warranty: 40 Years

Available Material Type:
Painted, Galvalume®

Gauging System: Teton Steel follows the national A.I.S.I. (American Iron and Steel Institute) specifications manual for tolerances in galvanized sheet metal.

All gauges conform to ASTM A792 and A653 Grade D (50,000 min. yield) unless otherwise specified at the time of the order.

APPLICATION DETAILS

Minimum Slope Requirement: 3:12

Screw Application: #10 Wood grip fasteners are designed for use with dimensional lumber, #14 Wood grip fasteners are designed for use with plywood sheathing, OSB, and wafer wood (7/16" minimum thickness). #12 Tek screws are designed to be used with structural steel up to 3/16" in thickness.

Roof Application: Fasteners to be applied along side every rib and attached to each purlin, 2' on center. Please note that it is the responsibility of the builder to ensure that purlins are adequately spaced to meet specific engineering requirements.


Teton Steel is neither partially nor solely responsible for improper installation or defects as a result of installation.

TETON STEEL


2' DELTA RIB

28 GA.
(10'1" / Stick)


Standard Ridge Cap




Gable




Outside Corner




Eave




Style-D Eave




High Eave




W-Valley




Endwall




Sidewall




Lower Transition




Upper Transition




Snow Stop




3/4" J-Metal




Inside Corner




Wainscott




L-Base / Drip Cap



Square Base



Angle Base



****Teton Steel is neither partially or soley responsible for improper installation or defects as a result of installation****