

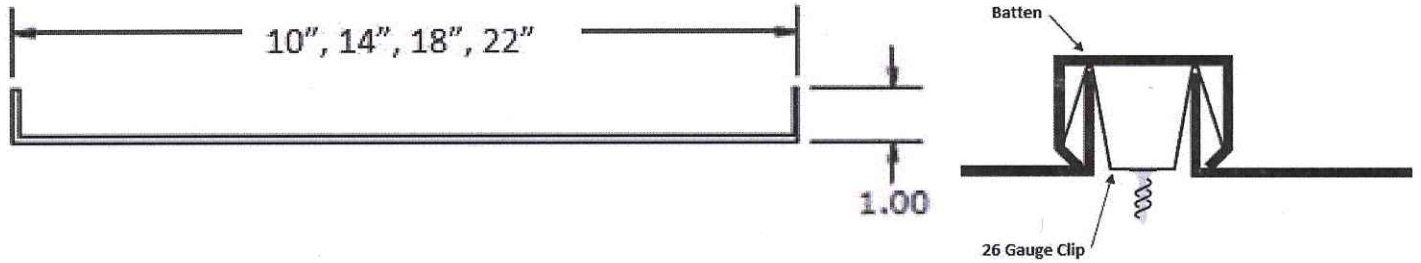








TETON STEEL



(10'1" STICK)



Gauge: 24, 26

Weight: 1.00lb./SQFT., .75lb/SQFT.

Steel Yield Stress: 50,000, Grade-D

Galvalume Steel Gauge, AZ-50,

Paint System: ULTRA-CLAD™

Kynar 500®/ Hylar 5000®. Printech® PVDF

Warranty: 35 Years on

ULTRA-CLAD™, 20 Years on Printech®

Available Material Types:

Painted, Galvalume, Bonderized,

Western Rust, CORE-TEN™, 16 & 20 oz. Copper

Gauging System: Teton Steel

follows the national A.I.S.I.

(American Iron and Steel Institute)

manual for

tolerances in galvanized sheet

metal.

All gauges conform to

ASTM: A792, A653, A924

Grade D (50,000 min. yield) unless

otherwise designated at time of

order.

Snap Batten can be installed in staggered widths and ran onsite
 It is available in Cool Roof certified colors
 It can be installed over solid substrate
 Mastic can be applied for superior weather tightness

****Teton Steel is neither partially or solely responsible for improper installation or defects as a result of installation****

